



GH40・GH50 型

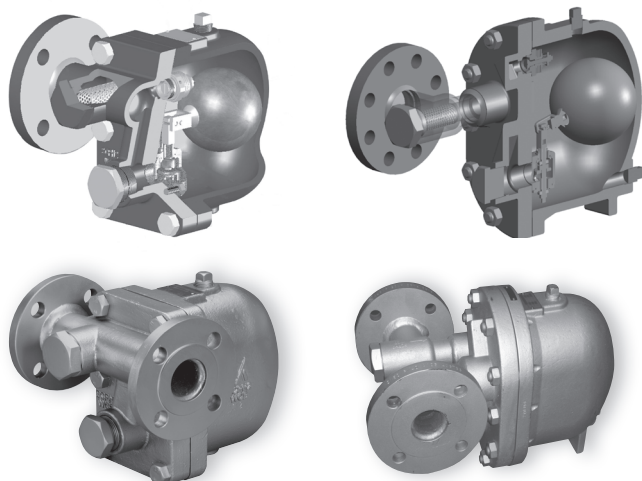


GH40


GH50

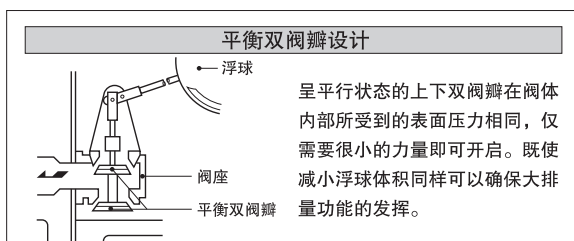


GH40-流量图

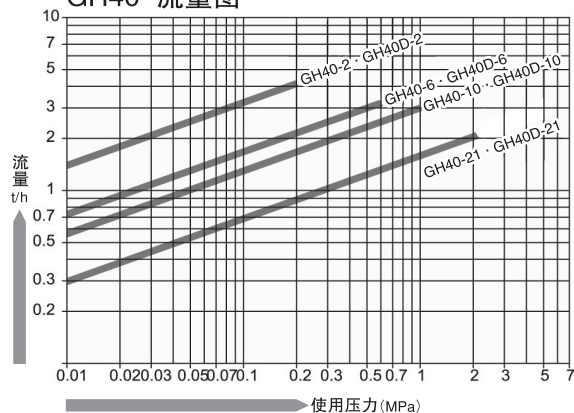

GH50-流量图

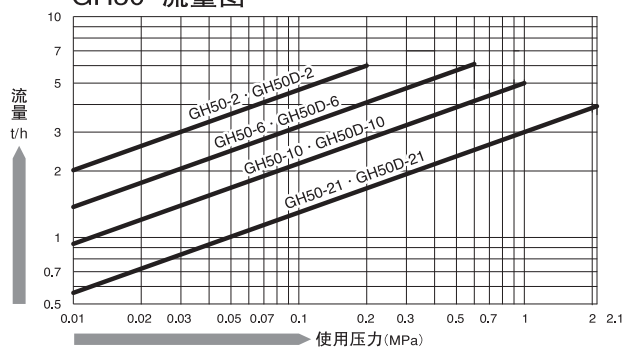

外形尺寸/规格一览

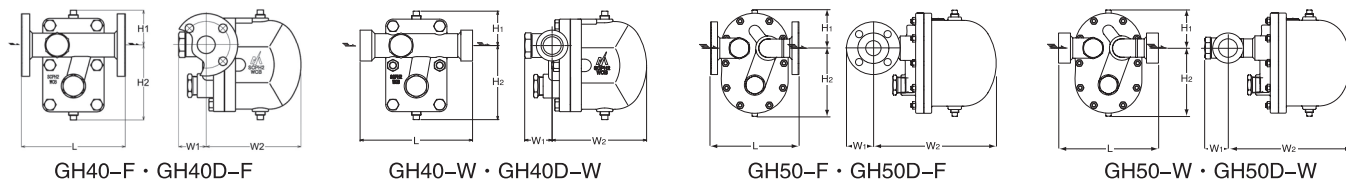

GH40-F・GH40D-F

GH40-W・GH40D-W

GH50-F・GH50D-F


GH50-W・GH50D-W

型 号	连 接		最高使用压力 PMO (MPa)	最大动力差压 ΔPMX(MPa)	最高使用温度 TMO (°C)	排空阀类型	阀体材质	尺 寸(mm)					重量 (kg)
	方 式	口 径(A)						L	H1	H2	W1	W2	
GH40-2F GH40-6F GH40-10F GH40-21F GH40-32F	法兰 (FF, RF)	40	0.2・0.6・1.0・ 2.1・3.2	0.2・0.6・1.0・ 2.1・3.2	400	双金属片类型	铸 钢 (SCPH2)	230	80	170	60	210	24
GH40-2W GH40-6W GH40-10W GH40-21W GH40-32W		50						250					19
	承插焊 (SW)	40						260					
		50											
GH40D-2F GH40D-6F GH40D-10F GH40D-21F	法兰 (FF, RF)	40	0.2・0.6・1.0・ 2.1	0.2・0.6・1.0・ 2.1	220	膜盒型	铸 钢 (SCPH2)	230	80	170	60	210	24
GH40D-2W GH40D-6W GH40D-10W GH40D-21W		50						250					19
	承插焊 (SW)	40						260					
		50											
GH50-2F GH50-6F GH50-10F GH50-21F GH50-32F	法兰 (FF, RF)	40	0.2・0.6・1.0・ 2.1・3.2	0.2・0.6・1.0・ 2.1・3.2	400	双金属片类型	铸 钢 (SCPH2)	230	107	173	60	330	37
GH50-2W GH50-6W GH50-10W GH50-21W GH50-32W		50						250					32
	承插焊 (SW)	40						260					
		50											
GH50D-2F GH50D-6F GH50D-10F GH50D-21F	法兰 (FF, RF)	40	0.2・0.6・1.0・ 2.1	0.2・0.6・1.0・ 2.1	220	膜盒型	铸 钢 (SCPH2)	230	107	173	60	330	37
GH50D-2W GH50D-6W GH50D-10W GH50D-21W		50						250					32
	承插焊 (SW)	40						260					
		50											

◆对应日标、美标、德标、国标等各规格法兰

※压力换算：1MPa=10.197kgf/cm²

GH40

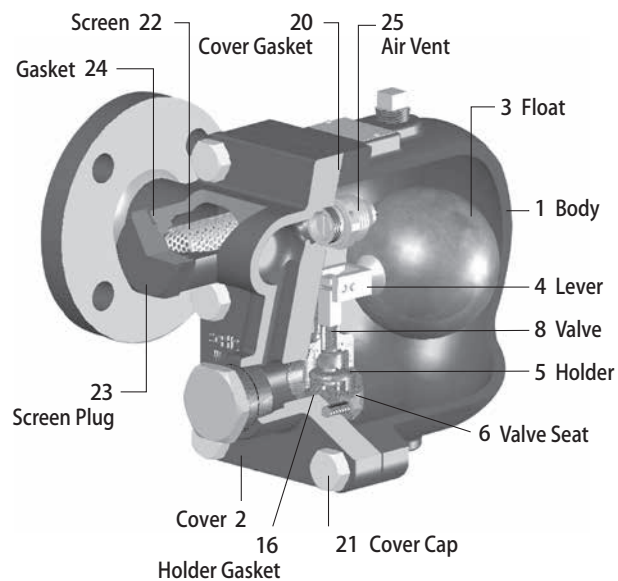

GH50

